


ANSI Standard Roller Chain (Duplex)

美标短节距精密滚子链条 (双排)

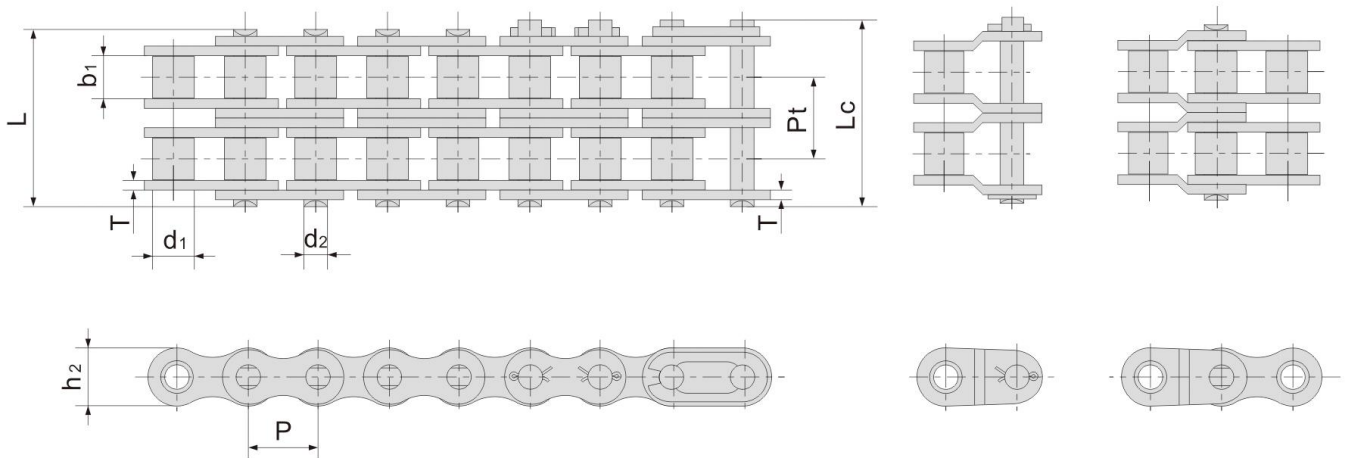

Standard Roller Chain

ISO Chain No.	ANSI Chain No.	Pitch	Width between inner plates	Roller diameter	Plate technical data		Pin Technique data			Min tensile strength	Average tensile strength	Approx unit weight	Transverse pitch
					链板厚度	链板宽度	销轴直径	销轴长度	接销长度				
ISO链号	ANSI链号	P (mm)	b1 (mm)	d1 (mm)	T (mm)	h2 (mm)	d2 (mm)	L (mm)	Lc (mm)	Q (KN)	Q0 (KN)	q≈ (Kg/m)	Pt (mm)
04C-2	25R-2	6.35	3.18	3.30	0.80	6.00	2.31	14.50	15.00	7.00	8.60	0.28	6.40
06C-2	35R-2	9.525	4.77	5.08	1.30	9.00	3.58	22.50	23.30	15.80	19.70	0.63	10.13
08A-2	40R-2	12.70	7.85	7.92	1.50	12.00	3.96	31.00	32.20	28.20	35.90	1.12	14.38
10A-2	50R-2	15.875	9.40	10.16	2.00	15.09	5.08	38.90	40.40	44.40	58.10	2.00	18.11
12A-2	60R-2	19.05	12.57	11.91	2.40	18.00	5.94	48.80	50.50	63.60	82.10	2.92	22.78
16A-2	80R-2	25.40	15.75	15.88	3.20	24.00	7.92	62.70	64.00	113.40	141.80	5.15	29.29
20A-2	100R-2	31.75	18.90	19.05	4.00	30.00	9.53	76.40	80.00	177.00	219.40	7.80	35.76
24A-2	120R-2	38.10	25.22	22.23	4.80	35.70	11.10	95.80	99.70	254.00	314.90	11.70	45.44
28A-2	140R-2	44.45	25.22	25.40	5.60	41.00	12.70	103.30	107.90	344.80	407.50	15.14	48.87
32A-2	160R-2	50.80	31.55	28.58	6.40	47.80	14.27	123.30	128.10	453.60	462.40	20.14	58.55
40A-2	200R-2	63.50	37.85	39.68	8.00	60.00	19.85	151.90	158.80	707.60	877.40	32.24	71.55
48A-2	240R-2	76.20	47.35	47.63	9.50	72.39	23.81	183.40	190.80	1020.60	1255.30	45.23	87.83

The first two items are bushing chain, d1 indicates the external diameter of the bushing
 表中的04C和06C是套筒链条，d1指的是套筒的外围直径

Spring Clip Type connecting link is applied to chain 60R and smaller one; Cotter Type connecting link is applied to chain 80R and larger one
 卡簧型接头适用于60R及以下规格滚子链条，开口销型接头适用于80R及以上规格滚子链条