


Heavy Duty Series Transmission Chain with Cranked Link

重载弯板传动链条

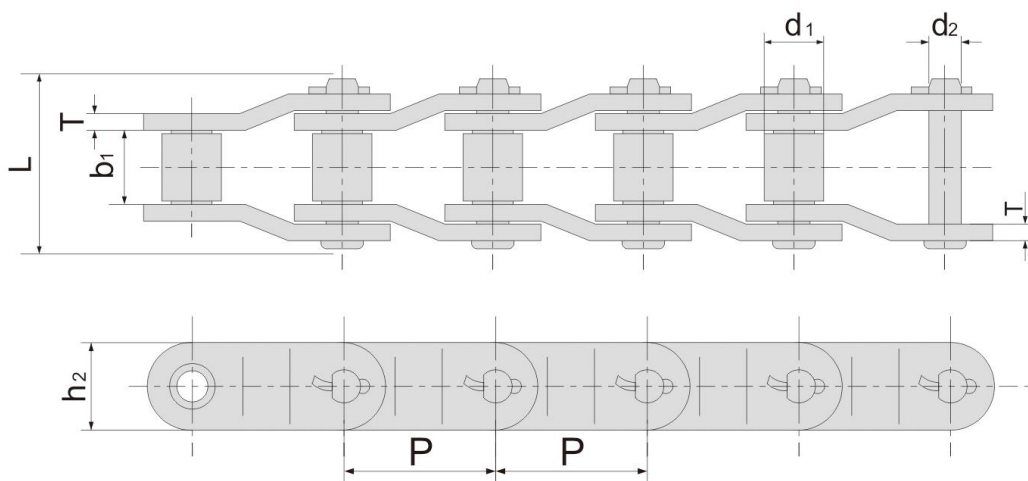

Standard Roller Chain

HS Chain No.	Pitch	Width between inner plates	Roller diameter	Plate technical data		Pin technique data		Min tensile strength	Average tensile strength	Approx unit weight
				链板参数		销轴参数				
				链板厚度	链板宽度	销轴直径	销轴长度			
HS链号	节距	内节内宽	滚子直径	链板厚度	链板宽度	销轴直径	销轴长度	最小抗拉强度	平均抗拉强度	近似米重
	P (mm)	b ₁ (mm)	d ₁ (mm)	T (mm)	h ₂ (mm)	d ₂ (mm)	L (mm)	Q (KN)	Q ₀ (KN)	q _≈ (Kg/m)
2010	63.50	38.10	31.75	7.90	47.80	15.90	90.70	250.00	270.00	14.00
2510	78.10	36.90	31.75	8.00	40.00	16.00	94.80	271.00	292.60	10.72
2512	77.90	39.60	41.28	9.70	57.00	19.05	100.00	340.00	367.20	18.40
2814	88.90	38.10	44.45	12.70	60.50	22.25	117.60	470.00	507.60	25.10
3214	103.20	48.00	44.45	13.00	55.00	22.00	123.50	476.00	514.00	23.60
3315	103.45	49.30	45.24	14.20	63.50	23.85	134.90	550.00	594.00	27.30
3618	114.30	52.30	57.15	14.20	79.20	27.97	141.20	760.00	820.80	38.20
4020	127.00	69.90	63.50	15.70	91.90	31.78	168.10	990.00	1069.20	52.10
MXS882	66.27	28.58	22.23	6.40	28.50	11.10	68.50	115.60	124.80	5.30
MXS3075	78.10	38.10	31.75	9.70	44.50	16.46	93.50	334.00	360.70	13.45
MXS1242	103.20	49.20	44.45	12.80	57.00	22.23	124.50	623.00	672.80	24.63
SS568H	77.90	39.70	41.30	9.50	57.00	19.05	97.60	515.00	556.00	13.95