
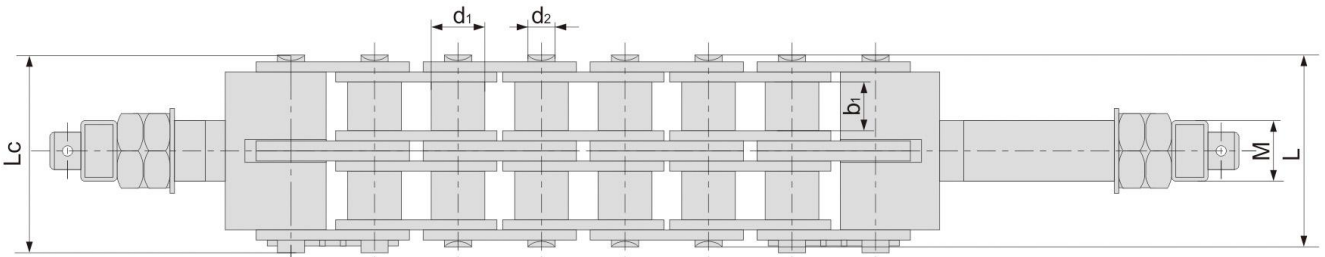
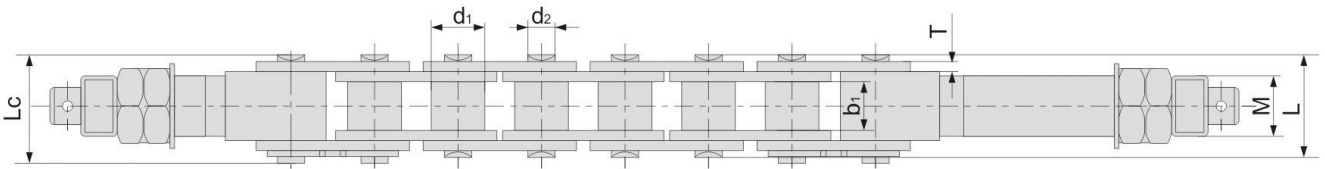


# Tridimensional Parking Equipments Chain

立体停车库设备链条

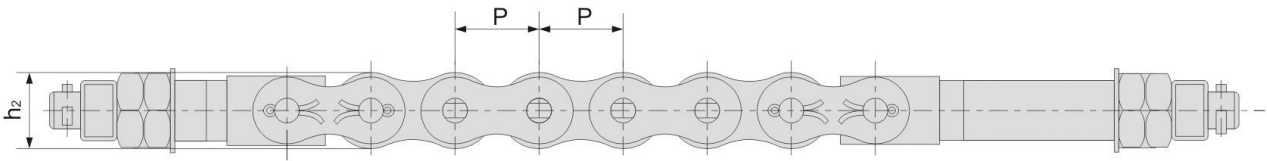

Tridimensional Parking Equipments Chain

HS Chain No.	Pitch	Width between inner plates	Roller diameter	Pin diameter	Pin length		Width of inner plate	Plate thickness	Bolt type	Min tensile strength	Average tensile strength	Approx unit weight
HS链号	节距	内节内宽	滚子直径	销轴直径	销轴长度		链板高度	链板厚度	螺栓规格	最小抗拉强度	平均抗拉强度	近似米重
	P (mm)	b1 (mm)	d1 (mm)	d2 (mm)	L (mm)	Lc (mm)	h2 (mm)	T (mm)	M (mm)	Q (KN)	Q0 (KN)	q≈ (Kg/m)
LT60-1	19.05	12.57	11.91	5.94	25.90	27.50	18.00	2.42	M16	37.32	42.50	1.59
LT80-1	25.40	15.75	15.88	7.92	32.70	36.50	24.00	3.25	M20	71.55	81.80	2.69
LT80-2	25.40	15.75	15.88	7.92	62.70	65.80	24.00	3.25	M24	143.10	166.30	5.33
LT100-1	31.75	18.90	19.05	9.53	40.40	44.70	30.00	4.00	M24	107.85	118.60	4.04
LT100-2	31.75	18.90	19.05	9.53	76.40	80.50	30.00	4.00	M24	215.70	234.40	7.98
LT100-3	31.75	18.90	19.05	9.53	112.20	116.30	30.00	4.00	M24	323.55	351.60	11.85
LT120-1	38.10	25.22	22.23	11.10	50.45	53.50	36.00	4.80	M30	149.20	161.10	5.95
LT120-2	38.10	25.22	22.23	11.10	95.80	99.70	36.00	4.80	M30	298.40	322.20	11.75